Camera Security / **SuperLink Sensors**

# Siren



## Overview

| | |
|---|---|
| Dimensions | 139.9 x 139.9 x 35 mm (5.5 x 5.5 x 1.4") |
| Mounting | Wall, ceiling mounting plate (Included) |

## Mechanical

| | |
|---|---|
| Weight | 345 g (12.2 oz) |
| Enclosure Material | Aluminum alloy, polycarbonate |
| Weatherproofing | IP56 |

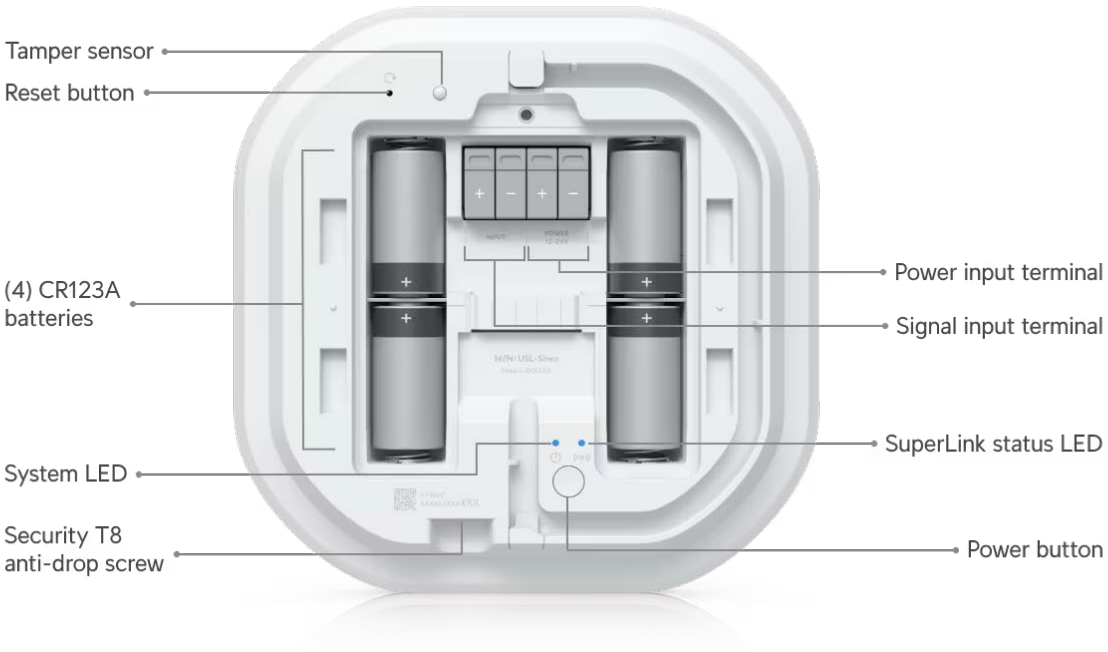
## Hardware

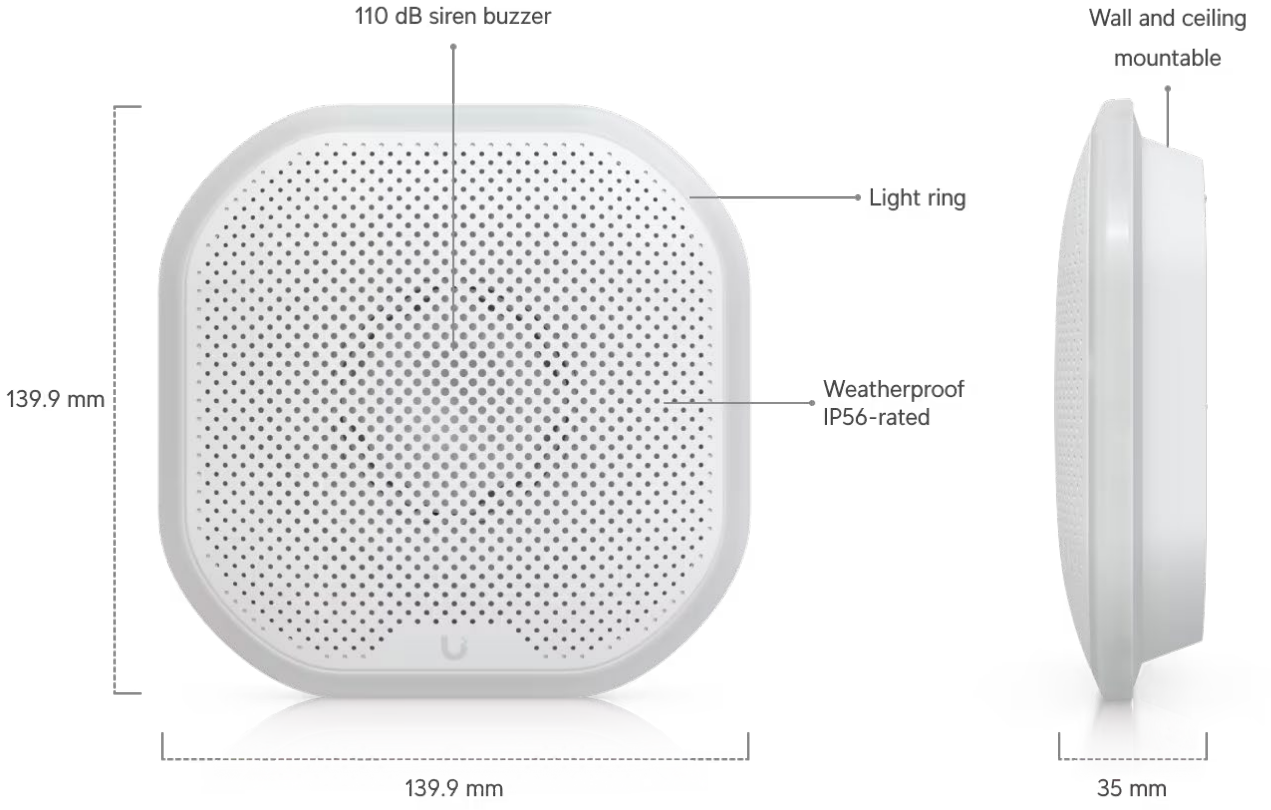
| | |
|---|---|
| Power Method | (4) CR123A batteries<br>12-24V DC |
| Max. Power Consumption | 5W |
| Input Terminals | (1) Power input<br>(1) Signal input |
| Connectivity | SuperLink (Proprietary) |
| Buzzer | ✓ |
| Antenna Gain | |
| └ SuperLink | 2 dBi |
| Max. TX Power | |
| └ SuperLink | 14 dBm |
| Operating Frequency | |
| ├ US | 915.6-927.6 MHz |
| └ EU | 865.1-869.5 MHz |
| Max. Range | |
| └ SuperLink | 2 km (1.2 mi) |

| | |
|---|---|
| LEDs | |
| System | R/G/B/W |
| Status | R/G/B |
| Light Ring | R/G/B/W |
| Buttons | (1) Power<br>(1) Factory reset<br>(1) Tamper switch |
| Ambient Operating Temperature | -30 to 50° C (-22 to 122° F) |
| Ambient Operating Humidity | 5 to 90% noncondensing |
| Certifications | FCC, IC, CE |
| NDAA Compliant | ✓ |

## Software

| | |
|---|---|
| Management Application | |
| UniFi Protect Web | ✓ |
| UniFi Protect iOS™ and Android™ | ✓ |


Tamper sensor
Reset button
(4) CR123A batteries
System LED
Security T8 anti-drop screw
Power input terminal
Signal input terminal
SuperLink status LED
Power button


110 dB siren buzzer
Light ring
Weatherproof IP56-rated
139.9 mm
139.9 mm
Wall and ceiling mountable
35 mm