
# Injecteur PoE

MODELE: TL-POE150S

## Caractéristiques

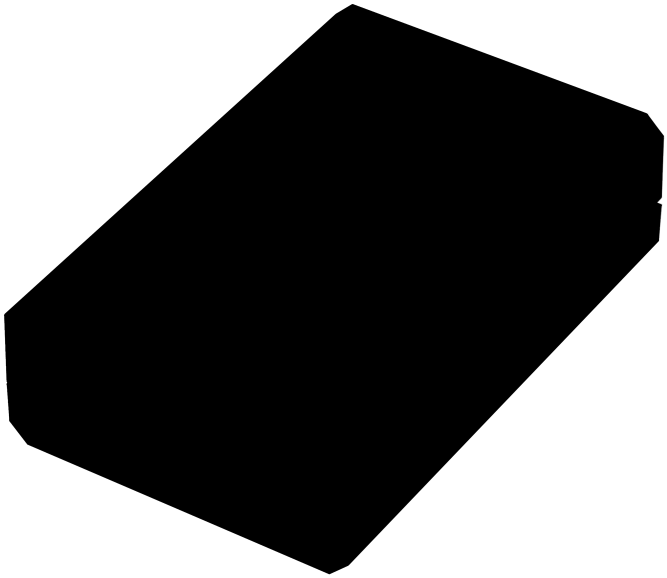

- Conforme à la norme IEEE802.3af
- Économie de coûts, pas de câblage d'alimentation pour le périphérique réseau Ethernet
- Fournit de la puissance et des données sur un seul câble jusqu'à 100 mètres
- L'algorithme avancé de détection automatique permet de fournir de l'énergie avec 802.3af PD
- Prend en charge la classification de puissance, détermine automatiquement les exigences d'alimentation nécessaires
- Haute sécurité avec protection contre les courts-circuits
- Installation Plug & Play, ne nécessite aucune configuration
- Alimentation externe 48VDC


## Présentation

L'injecteur PoE TL-POE150S est entièrement conforme à la norme IEEE 802.3af et peut fonctionner avec tous les PD (périphériques alimentés) ou adaptateurs de récepteur PoE conformes IEEE 802.3af, tels que TP-Link. Le TL-POE10R, ou tout autre produit équivalent, pour étendre votre réseau là où il n'y a pas de ligne électrique ou de prise, là où vous souhaitez réparer un appareil tel qu'un PA, une caméra IP ou un téléphone IP, etc.

# Spécifications

| | [redacted] |
|---|---|
| Model | TL-POE150S |
| Standards | IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3af |
| Ports | 1 10/100/1000Mbps Auto-Negotiation RJ45 LAN port(LAN IN)<br>1 10/100/1000Mbps Auto-Negotiation RJ45 PoE port(POWER+DATA OUT)<br>1 power socket(DC IN) |
| Network Media | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-TX: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>1000BASE-T: UTP category 5, 5e, 6 cable(maximum 100m) |
| Basic Function | Auto-Sensing Algorithm enables providing power with 802.3af PD<br>Delivers power and data over the single cable up to 100 meters<br>Auto-determine the necessary power requirements<br>Plug-and-Play |
| Power | Input: External 48VDC power adapter<br>Output: Auto-determine the necessary Power requirements(max. 15.4W) |
| LED Indicator | ON: Supplying power normally<br>Flashing: NO PD connected/Supplying power abnormally<br>Off: No power supply |
| Dimensions ( W x D x H ) | 80.8 x 54 x 24mm |
| Certification | FCC, CE, RoHS |
| Package Contents | TL-POE150S, Power Adapter, RJ45 cable, Installation Guide |
| Environment | Operating Temperature: 0°C~40°C<br>Storage Temperature: -40°C~70°C<br>Operating Humidity: 10%~90%RH non-condensing<br>Storage Humidity: 5%~90%RH non-condensing |

# Topologie

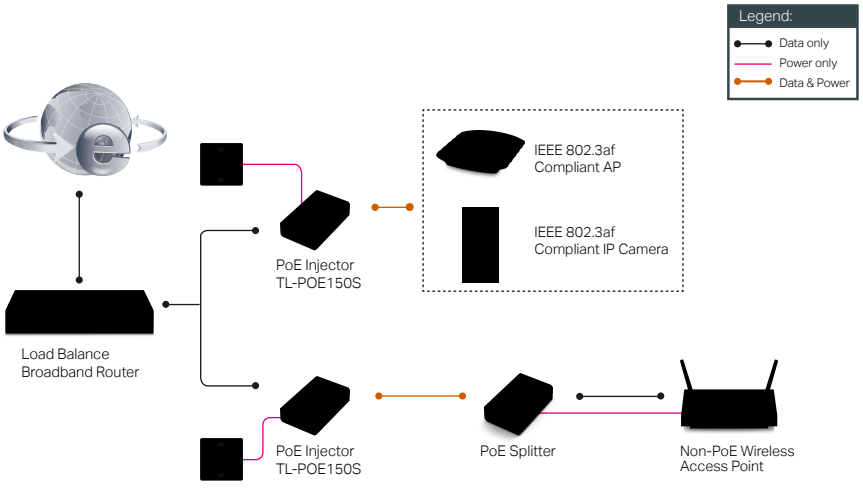


## Package:

- TL-POE150S PoE Injector
- One Ethernet (CAT.5 UTP) Cable
- One Power Adapter
- User Guide

## Produits Associés:

- Load Balance Broadband Router TL-R470T+
- AC750 Wireless Gigabit Access Point AP200
- PoE Splitter TL-POE10R

www.tp-link.com

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2017 TP-Link Technologies Co., Ltd. All rights reserved.