Camera Security / **SuperLink Sensors**

Remote Control KeyFob



Overview

Dimensions	67 x 35 x 18.5 mm (2.6 x 1.4 x 0.7")
UniFi Application Suite	Protect

Performance

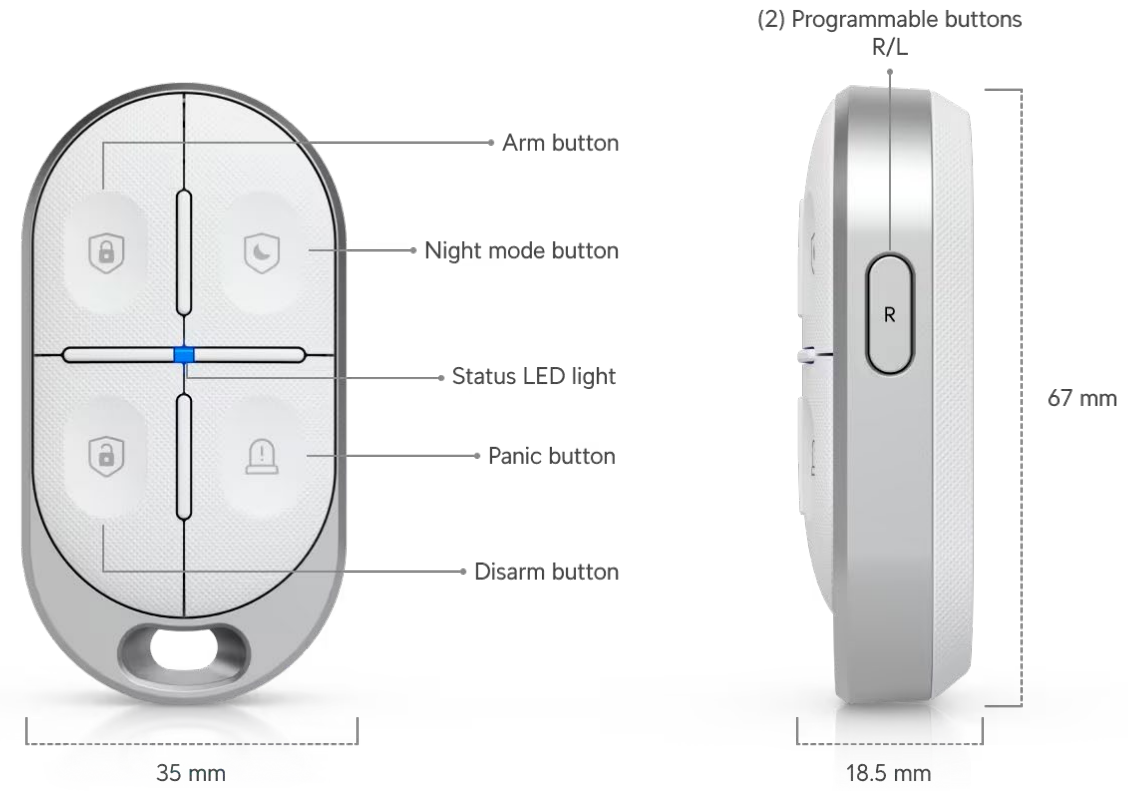
Connectivity	SuperLink (Proprietary)
Operating Frequency	
US	915.6-927.6 MHz
EU	865.1-869.5 MHz
Antenna Gain	
SuperLink	-1 dBi
Max. TX Power	
SuperLink	14 dBm
Max. Range	
SuperLink	2 km (1.2 mi)

Hardware

Max. Power Consumption	150mW
Supported Voltage Range	3V
Power Method	(1) Lithium battery Size: CR2450 Capacity: 600 mAh Max. pulse current: 50mA
Battery Life	Up to 10 years
Weight	32 g (1.1 oz)
Enclosure Material	Polycarbonate
Buttons	(4) Top buttons: Primary faceplate: Arm, Disarm, Night mode, Panic Secondary faceplate: Numeric (1, 2, 3, 4) for programmable functions (2) Side buttons for programmable functions
LEDs	(1) Status: R/B/W (1) Signal: B/R
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC, UL 4200A
NDAA Compliant	✓

Software

Application Requirements	
Web Application	UniFi Protect
Mobile App	UniFi Protect iOS™ and Android™


(2) Programmable buttons
R/L
Arm button
Night mode button
Status LED light
Panic button
Disarm button
R
67 mm
35 mm
18.5 mm


UI.COM
M/N: USL-FOB
Made in XXXXXX
*YYWWC
XXXXXXXXXXXX
CR2450
Reset button
Lithium battery CR2450