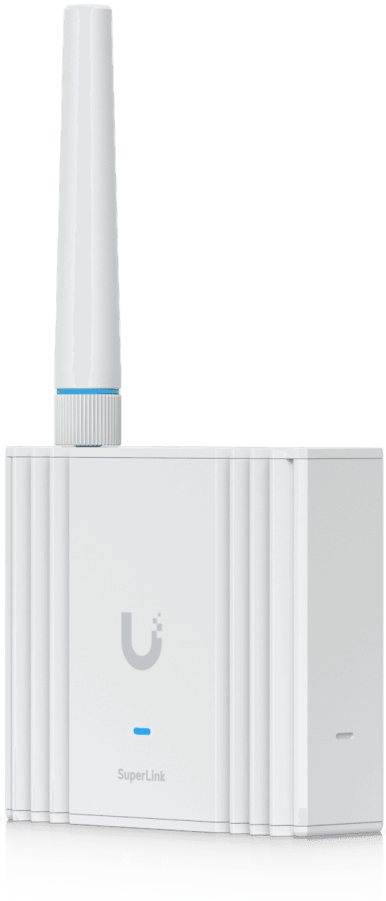
Camera Security / **SuperLink Sensors**

SuperLink Gateway



Overview

Dimensions	With antenna: 159.3 x 81.9 x 26 mm (6.3 x 3.2 x 1") With DIN rail mount: 159.3 x 81.9 x 38.5 mm (6.3 x 3.2 x 1.5") With wall mount: 159.3 x 81.9 x 30.5 mm (6.3 x 3.2 x 1.2")
Mounting	Wall and DIN rail mount
UniFi Application Suite	Protect

Performance

Networking Interface	(1) 10/100 MbE RJ45 port
Connectivity	Bluetooth® 5.2 SuperLink (Proprietary)
Operating Frequency	
Bluetooth	2400-2480 MHz
SuperLink	US: 915.6-927.6 MHz EU: 865.1-869.5 MHz
Antenna Gain	
Bluetooth	3 dBi
SuperLink	2 dBi
Max. TX Power	
Bluetooth	10 dBm
SuperLink	27 dBm
Max. Range	
Bluetooth	Up to 100 m (328 ft)
SuperLink	2 km (1.2 mi)
Max. Client Count	
Bluetooth	7
SuperLink	96

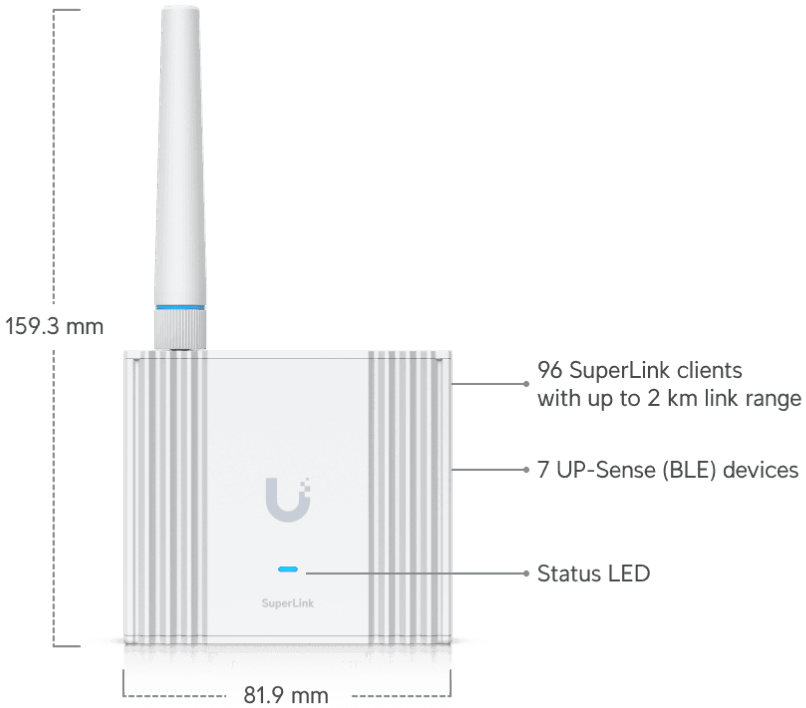
Hardware

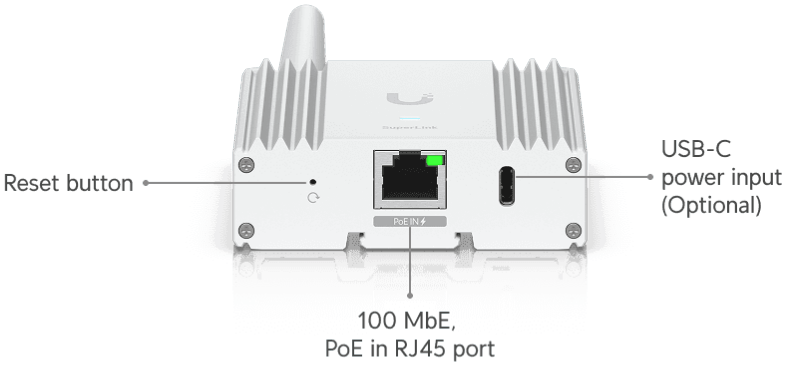
Max. Power Consumption	3.4W
Power Method	PoE USB Type-C, 5V, 1A (Optional)
Weight	179 g (6.3 oz)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Polycarbonate
Buttons	(1) Factory reset
LEDs	(1) Status: B/W
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC
NDAA Compliant	✓

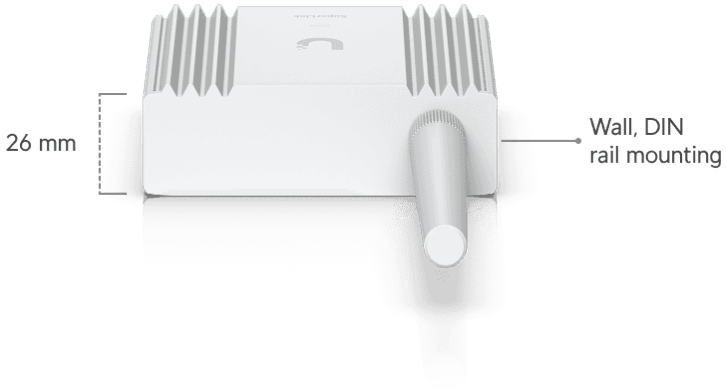
Software

Application Requirements

Web Application	UniFi Protect
Mobile App	UniFi Protect iOS™ and Android™


159.3 mm
96 SuperLink clients
with up to 2 km link range
7 UP-Sense (BLE) devices
Status LED
SuperLink
81.9 mm


Reset button
USB-C
power input
(Optional)
PoE IN
100 MbE,
PoE in RJ45 port


26 mm
Wall, DIN
rail mounting